

A Two-Stage Regenerable Filter for Collection and Disposal of Carbon Fines

Gordon M. Berger¹

Universities Space Research Association, Cleveland, OH 44135

Juan H. Agui²

NASA John H. Glenn Research Center, Cleveland, OH 44135

Cara S. J. Black³

NASA George C. Marshall Space Flight Center, Huntsville, AL 35812

Jeffrey J. Mehan⁴

Jacobs Space Exploration Group, Huntsville, AL 35812

and

John T. Holtsnider⁵ and Bryan D. McCurry⁶

Umpqua Research Company, Myrtle Creek, OR 97457

NASA is investigating the use of the Plasma Pyrolysis Assembly (PPA), which is a methane post-processing technology with the goal to recover hydrogen from the Carbon dioxide Reduction Assembly (CRA) currently onboard the International Space Station (ISS). The PPA can theoretically recover 75% of hydrogen from methane produced by the CRA. During methane processing the PPA creates roughly 40 mg/hr of carbon particles when operating at 4 crew member levels. The unwanted particles need to be removed from the stream to prevent any clogging of downstream components. The Regenerable Carbon Filter (RCF) was designed by Umpqua Research Company to address the carbon particles created in the PPA. The RCF includes two stages. The first is an electrostatic precipitator designed to collect ultrafine particles. The second is a low pressure drop physical filter. Both filters are made of heat tolerant materials to allow regeneration of the filtration capacity by O₂ oxidation of captured carbon. This paper will discuss the RCF hardware and test plans.

Nomenclature

<i>CM</i>	= crew member
<i>CRA</i>	= Carbon Dioxide Reduction Assembly
<i>ESP</i>	= electrostatic precipitator
<i>GC-MS</i>	= gas chromatograph – mass spectrometer
<i>HEPA</i>	= high efficiency particulate air filter
<i>ISS</i>	= International Space Station
<i>MSFC</i>	= Marshall Space Flight Center

¹ Scientist, Universities Space Research Association, 21000 Brookpark Rd, MS 110-3, Cleveland, OH 44135

² Aerospace Engineer, NASA Glenn Research Center, 21000 Brookpark Rd, MS 77-5, Cleveland, OH 44135

³ Environmental Control and Life Support Engineer, NASA Marshall Space Flight Center, Building 4755, Huntsville, AL 35812

⁴ Test Engineer, Jacobs Space Exploration Group, NASA Marshall Flight Center, Building 4755, Huntsville, AL 35812


⁵ Umpqua Research Company, 125 Volunteer Way, Myrtle Creek, OR 97457

⁶ Umpqua Research Company, 125 Volunteer Way, Myrtle Creek, OR 97457


PPA = Plasma Pyrolysis Assembly
RCF = Regenerable Carbon Filter
SBIR = Small Business Innovation Research
SLPM = standard liters per minute
URC = Umpqua Research Company

I. Introduction

ENVIRONMENTAL control and life support technologies for future long term space missions will require a higher level of efficiency, reliability and robustness than current state-of-the-art technologies utilized for Low Earth Orbit missions that benefit from periodic resupply. Currently, on the International Space Station, the Carbon Dioxide Reduction Assembly (CRA) utilizes a Sabatier reactor to recover 50% of oxygen as water from metabolic carbon dioxide.¹




NASA is targeting technologies that can increase the oxygen recovered to a minimum of 75% with a target goal of 90%. One way to achieve additional oxygen recovery is to utilize a methane post-processor to liberate and recycle the hydrogen in the methane being vented overboard by the CRA. For this purpose, NASA has been exploring the use of a Plasma Pyrolysis Assembly (PPA). The PPA was designed by Umpqua Research Company (URC) and has been undergoing ground testing. In a hydrogen rich flow (approximately 8 SLPM at 110 torr), the plasma converts methane to acetylene, theoretically recovering 75% of the hydrogen that would be lost with venting of the methane.²



In the course of the dehydrogenation of methane, a small amount of residual solid carbon is formed that coats the plasma-locating stubs and inner walls of the PPA. Operating the plasma system under a carbon dioxide-atmosphere is used to remove the surface coatings. During nominal 4-crew members (4-CM) flow rate operation, approximately 0.04g/hr of carbon particulate matter is generated. These carbon particles escape the reactor and pass downstream. The solid carbon that escapes downstream typically accounts for less than 0.2% of reacted carbon from the PPA. These ultrafine carbon particles (100-200 nm) must be captured to avoid clogs, shorting or other carbon-based fouling in the downstream systems.³

Multiple efforts have been made to capture this nuisance carbon to maintain the system in running condition with only short periods of regular maintenance. These systems were conceived to use carbon dioxide to oxidize the trapped carbon particles to return their filtration capacity.



In the past the goal was to match the carbon dioxide oxidation cycle of the PPA plasma-locating stubs. The PPA typically will operate for 6-8 hours before needing to be cleaned, which takes about 30 minutes to complete. Porous ceramic and porous metal filters have been used as the filter material elements to allow for multiple regular heating cycles in the range of 600-750°C.^{4,5,6} Carbon dioxide is a byproduct of human respiration and an available oxidizer that does not require processing to recover and is already being separated for oxygen recovery. However, oxygen will make for faster filter regeneration and return to operation.

In this paper, URC developed the Regenerable Carbon Filter (RCF) under an SBIR Phase II contract to capture carbon particles from the PPA.

II. Hardware Description

The RCF has been designed without use of traditional filter media. The first unit is an electrostatic precipitator (ESP) and a second unit is loosely packed with layers of high temperature resistant material to catch most of the carbon that passes through the ESP. Both units were designed to keep pressure drop low and to survive oxidation regeneration temperatures.

The RCF ESP, illustrated in figure 1, centers around a corona wire consisting of a central 2-strand twisted Nichrome electrode that under high voltage generates ions from the surrounding gas. This electrode is modified with 0.63 cm

long platinum wires mounted perpendicularly through the top 3.3 cm of the central twisted wire. The 2-strand spine lends added strength to the design while the “bottle brush” platinum wires provide fine tips to lower the supply voltage required to initiate the corona. An electric potential of approximately -2000 V is used to generate the corona ions.

As shown in figure 1 by the wavy black arrows, the hydrogen/acetylene effluent from the PPA carried the carbon particles through the top of the main RCF reactor into a plenum. The gas flow is distributed through multiple ports in the insulation around the ESP electrode (purple line). Carbon particles travel through the corona field where the ion charge is transferred to the particles. The carbon particles leaving the PPA are expected to carry limited or no charge from the PPA process to interfere with the corona charging, given the microwave plasma is not operating with an external field potential.^{7, 8} The gas flow moves out radially through the outer collection mesh and then through the quartz wool which is loosely packed above the gas exit ports.

During PPA operation, a hydrogen sweep gas flows up an alumina channel along the length of the corona wire. This is intended to keep the corona electrode free from interfering collected particles. The charged ions are accelerated axially through an accelerating mesh towards a second collecting mesh (straight purple arrows in figure 1 illustrate the path taken by the corona-formed charge). En route, the ions interact with and transfer charge onto nuisance carbon particles. The particles are then attracted to the oppositely charged outer collector mesh where the charge is dissipated and they are held by molecular forces until regeneration. Any remaining carbon particles must then pass through loosely distributed quartz wool where the high surface area provides an additional capture opportunity before exiting this filter. Initial tests showed that this filter alone captures approximately 80% by weight of the carbon created by nominal PPA operation over an 8 hour test.

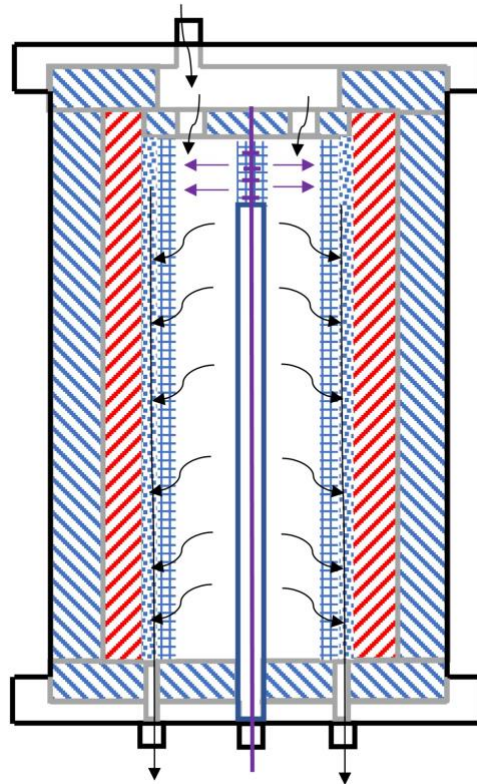


Figure 1. Diagram of main Regenerable Carbon Filter. Parts of the RCF starting at the outside and working to the middle: Stainless steel reactor wall (thick black line), Ceramic insulation (\\-blue hatched boxes), Heating element (/ /-red hatched boxes), Quartz wool (fluffy gray area), Outer collector mesh (blue cross-hatched area), Alumina hydrogen channel (thick blue box), Accelerating mesh (blue cross-hatched area on top of the alumina hydrogen channel), Corona electrode (purple center line, with bottle brush at top). The thin black wavy flow arrows illustrate the intended path of the hydrogen/acetylene mix containing carbon particles during PPA operation/filter loading. The straight purple arrow illustrate the passage of charged ions moving from the corona electrode, through the accelerating mesh to the outer collector mesh.

To address this small amount of carbon particulate matter that remains entrained in the air stream, a second After Burner reactor was added downstream of the main RCF reactor. This unit is based on layering progressively more compact refractory fibers over each other to allow most of the carbon material to collect by depth filtration on loose fibers that are encountered first. This allowed for a small change in pressure drop, as the carbon particles deposit on loose wool before encountering the finer pores of the ceramic blanket and finally paper. This was achieved by layering quartz wool over 4 pound per cubic foot (64 g/L) Fiberfrax Durablanket-S over Fiberfrax 970J Ceramic Paper over a Nichrome mesh tube for support. Test loadings of the After Burner without the RCF in line, resulted in approximately 2% by weight of expected PPA-produced carbon being collected on a downstream HEPA filter, meaning that on its own for a short period, the After Burner captured about 98% by weight of the PPA-produced carbon particles.

Approximately 8 hours of PPA operation will occur before the PPA requires regenerations. The PPA will be regenerated with the carbon dioxide-rich mix, which also serves to flush the RCF volume of combustible gases. With the PPA turned off, regeneration of the RCF and After Burner in oxygen will follow. During the PPA regeneration, separate heaters in both RCF reactors will be heated to the desired temperature; 750°C has been used to make both reactors visibly clean. Initial tests show that carbon oxidation in the main RCF reactor with two times the stoichiometric required oxygen at 110 torr (14.6 kPa) and 750°C for 20 minutes removed all visible carbon from the inside of the reactor. This gas flow will be the initial condition tried for regeneration of both reactors simultaneously.

III. Hardware Integration

The RCF was delivered to NASA Marshall Space Flight Center for integration with the ground-based engineering PPA 4-CM unit. The technology is housed in the Environmental Control and Life Support (ECLS) Test Facility. More specifically, the PPA and RCF have been integrated into the Exploration Chamber for test. It is in the process of being integrated into the automated operational interface. Safety checks and reviews focus on the new hardware but also the changeover to oxygen as the regenerative oxidizer from carbon dioxide for these filters. Initial leak checks and powering up have been done to confirm that the equipment survived transport and was reassembled properly.

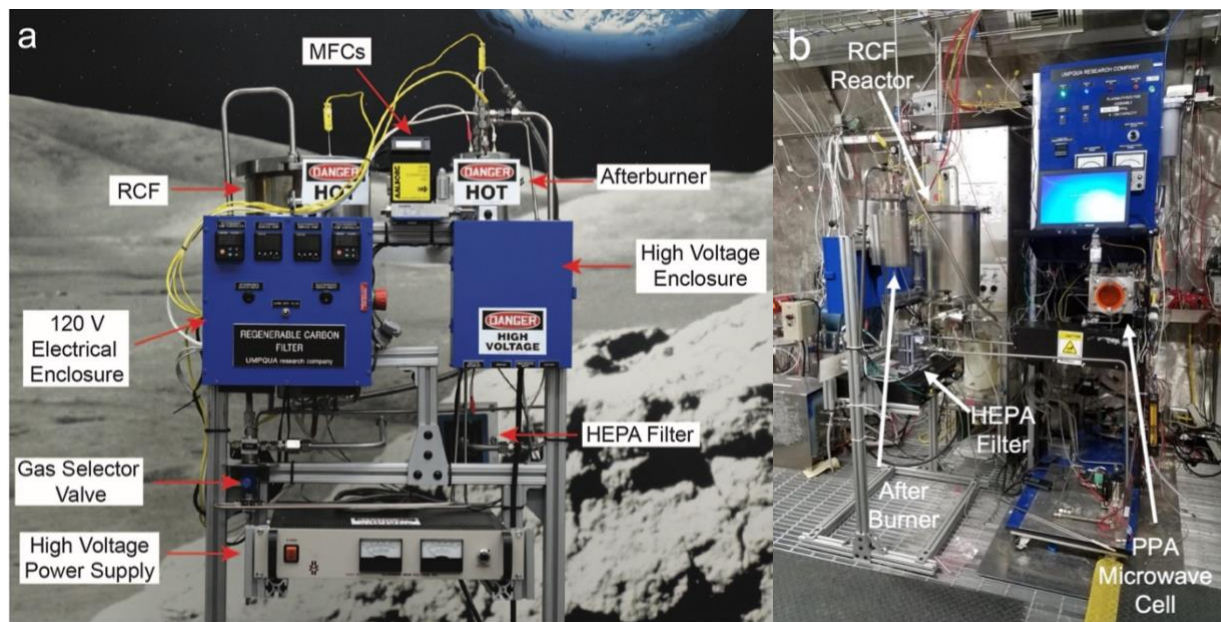


Figure 2. Images of the RCF. a) Control panel for reactor heaters and power system. b) The back of the RCF attached to the PPA at MSFC. Both RCF reactors are shown.

IV. Future Work

Once the RCF is fully integrated with the PPA, tests will begin. The PPA/RCF system will be operated at full 4-CM flow rates. The PPA baseline operation is already well characterized. The system will be run on bottled gas inputs until the PPA power rise indicates a need for regeneration or the pressure drop across the RCF filter rises too high. Loading of the RCF will be monitored for change in pressure drop. During regeneration, active oxidation will

be monitored by GC-MS sampling of effluent gas – carbon dioxide production will show successful oxidation of carbon captured in the filters and when the process has been completed. Over multiple cycles, performance will be compared – both pressure drop and regeneration gas – to determine how the system works under prolonged operation and different conditions. Electrical continuity of the corona electrode will be monitored and the RCF reactor may be opened to visually inspect erosion or fouling of the corona electrode. A HEPA filter placed at the downstream end of the RCF will be opened and weighed to measure how much carbon breakthrough has occurred to allow evaluation of continued operation of the RCF. Conditions necessary to regeneration will be varied – including oxidation flow, pressure, regeneration temperature and duration.

Acknowledgments

The authors would like to acknowledge the support of SBIR Phase II contract 80NSSC18C0148 for development and assembly of the RCF unit. The support from NASA's Life Support System (LSS) project under the Advanced Exploration Systems (AES) program is greatly appreciated.

References

¹Greenwood, Z., Abney, M., Stanley, C., Brown, B. and Fox, E., "State of NASA Oxygen Recovery", 48th International Conference on Environmental Systems, July 8-12, 2018, paper 48.

²Greenwood, Z. W., Abney, M. B., Perry, J. L., Miller, L. A., Dahl, R. W., Hadley, N. M., Wambolt, S. R. and Wheeler, R. R., "Increased Oxygen Recovery from Sabatier Systems Using Plasma Pyrolysis Technology and Metal Hydride Separation", 45th International Conference on Environmental Systems, 12-16 July, 2015, paper 120.

³Green, R. D., Meyer, M. E., Agui, J. H., Berger, G. M., Vijayakumar, R. Abney, M. B. and Greenwood, Z., "Characterization of Carbon Particulates in the Exit Flow of a Plasma Pyrolysis Assembly (PPA) Reactor", 45th International Conference on Environmental Systems, 12-16 July, 2015, paper 304.

⁴Agui, J., Green, R., Vijayakumar, R., Berger, G., Greenwood, Z., Abney, M. and Peterson, E., "Filtration of Carbon Particulate Emissions from a Plasma Pyrolysis Assembly Reactor.", 46th International Conference on Environmental Systems, July 10-14, 2016, paper 309.

⁵Agui, J., Berger, G., Vijayakumar, R., West, P., Mitchell, K., Abney, M. and Greenwood, Z., "Particulate Filtration from Emissions of a Plasma Pyrolysis Assembly Reactor Using Regenerable Porous Metal Filters", 47th International Conference on Environmental Systems, July 16-20, 2017, paper 174.

⁶Agui, J., Black, C., Jones, J., and Berger, G., "Evaluation and Performance of a Regenerable Porous Metal Alloy Filter to Remove Carbon Particulates from a Plasma Pyrolysis Reactor Effluent", International Conference on Environmental Systems, 2020, paper 287.

⁷Wheeler, R. R., Hadley, N. M., Wambolt, S. R. and Abney, M. B., "Third Generation Advanced PPA Development", International Conference on Environmental Systems, 2014, paper 034

⁸Eliasson, B. and Kogelschatz, U., "Nonequilibrium Volume Plasma Chemical Processing", IEEE Transactions on Plasma Science, Vol. 19, No. 6, Decemeber 1991.